


Omega Ti200

Highly efficient RFID/EAS insertion solution

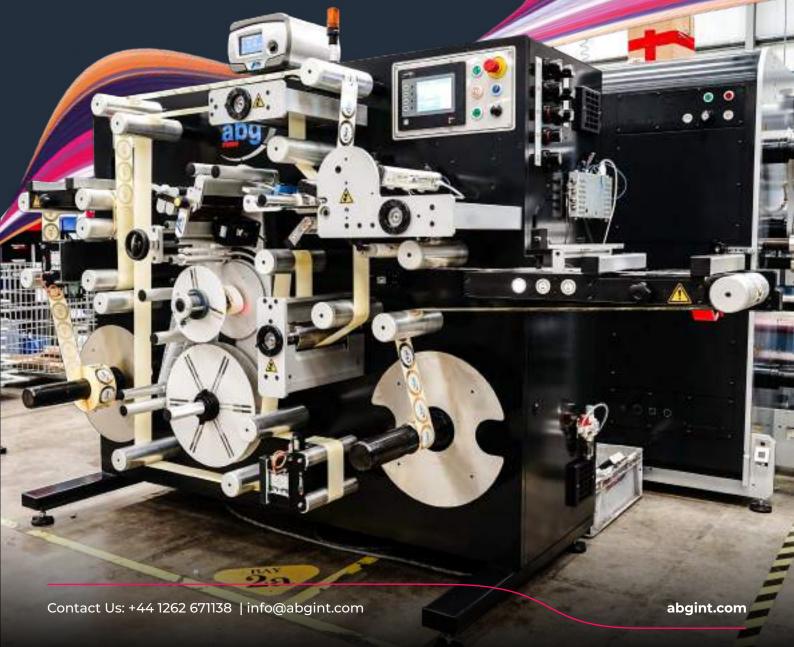

Omega Ti200

RFID/EAS Insertion Solution



The Ti200 is an entry level machine which takes rolls of finished, printed, die-cut labels and inserts security technology in a single pass. Its ease of use and low investment gives easy access to this exciting and rapidly expanding market.

The Ti200 is capable of integrating RFID and EAS tags and other types of inserts or labels.



Scan here for more information on Ti200 and RFID solutions.



Ti200 Technical Specification

Max. Web Width	200mm (8")
Min. Web Width	50mm (2")
Unwind/Rewind	450mm (18")
Max Applicator Speed	1,000 labels/min
Max. Label Length	305mm (12")
Min. Label Length	30mm (1 ¾")
Max. Web Speed	60m/min (195ft/min)

- Fast 1000 label insertions per minute.
- **Touch Screen Operation** easy to use and intuitive.
- Anti-static technology to limit dust attraction and reduce cleaning
- Two web guides deliver excellent web control
- Short web path improves efficiency, reduces waste.

Converting Lines for RFID

Converting systems for RFID production vary considerably from client to client. The Omega converting line gives customers a wide variety of functions and features to choose from in order to build a converting system that meets with their individual requirements.

Converting modules are available in 330mm (13"), 430mm (17") and 530mm (21") web widths and can produce self-adhesive label solutions as well as tag and ticket products.

